


80X125X12 HMS5 RG

Type of outside diameter	Rubber metal reinforced
Lip material	Nitrile rubber (NBR)
Seal design	HMS5
Compliance with standard	ISO 6194; DIN 3760

Dimensions

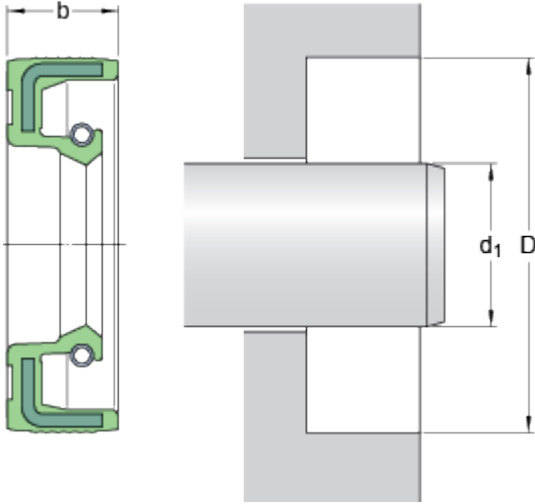

d_1	80	mm
D	125	mm
b	12	mm

Application and operating conditions

Operating temperature	min.	-40	°C
Operating temperature	max.	100	°C
Permissible operating temperature, short periods	max.	120	°C
Shaft speed	max.	2340	r/min
Shaft surface speed	max.	9.74	m/s