


DWG. NO.	REV.
PRLM	-

LTR	REVISION	BY	DATE	APPR
-	PRLM	RMC		



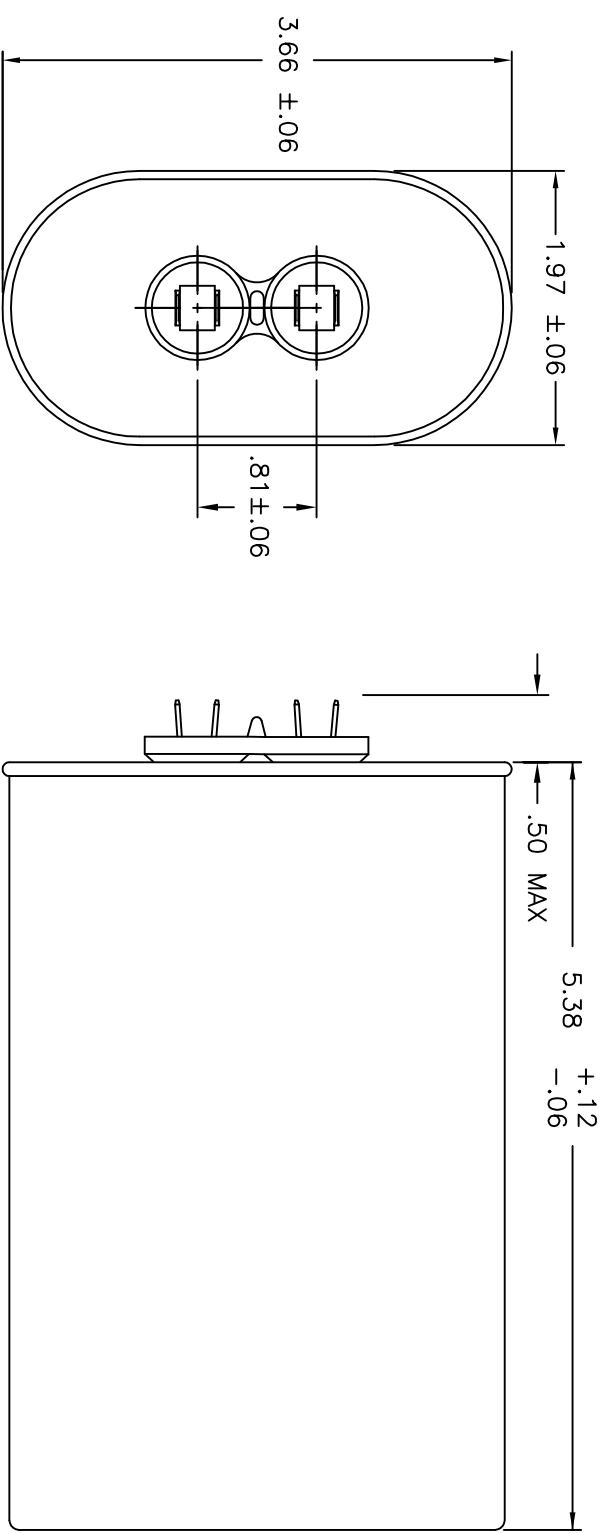

- NOTES:
1. AEROVOX P/N: H62S4660A0GA21B
 2. CAPACITANCE: 60uF +10%/-0%
 3. VOLTAGE: 460V 50/60HZ, 800VDC
 4. TERMINALS: STANDARD 2BL QUICK CONNECT
 5. OPERATING TEMP.: 70°C
 6. EXPECTED LIFE: 60,000 Hr DUTY AT 70°C
 7. PROTECTION: 10000 AFC
 8. CERTIFICATIONS: C22.2 NO190, UL cUL FILE# E51176
 9. CONTAINS UL 810 COMPLIANT PRESSURE INTERRUPTER
 10. FINISH: PAINTED GREY

STAMPING

CAUTION DISCHARGE BEFORE TOUCHING TERMINALS

AEROVDX P/N H62S4660A0GA
 60uF +10 -0% 460V 50/60HZ 70C 80-0197
 800 VDC
 PROTECTED D 10000 AFC
 (DATE) ND PCBs
 MADE IN USA C22.2 No190

INTERPRET DRAWING PER ASME Y14.5M-1994

UNLESS OTHERWISE SPECIFIED	DRAWN BY	DATE	TITLE:	
	R. CHIOLDI	4/4/13	H62S4660A0GA21B OD	
DIMENSIONS IN INCHES	CHECKED BY	DATE		
.000 ± .005				
.00 ± .01	APPROVED BY	DATE		
FRACTIONS ±1/64				
ANGLES ±0°30'				
CAD NO. PRLM	SHEET 1 OF 1		THIRD ANGLE PROJECTION	SCALE: N/A
				A
			DWG. NO.	PRLM
				REV. -

Aerovox Corp.

167 JOHN VERTENTE BLVD., NEW BEDFORD, MA 02745 USA

NOTICE: THIS DOCUMENT, THE PROPERTY OF AEROVOX GROUP AND RETURNABLE UPON REQUEST, MUST NOT BE REPRODUCED OR INFORMATION HEREIN TRANSMITTED IN ANY WAY WITHOUT WRITTEN CONSENT FROM THIS COMPANY. PATENTS HAVE BEEN GRANTED OR PATENT APPLICATIONS ARE PENDING OR IN PROCESS OF PREPARATION ON ALL OF OUR DEVELOPMENTS. 00009254 12/13/95