


Fast Ethernet Micro Switches 6 Port

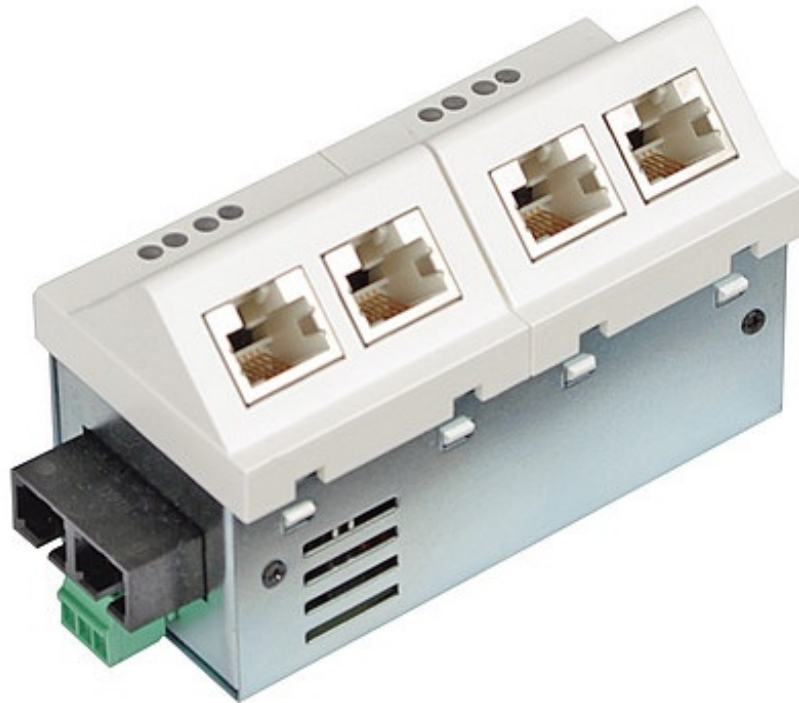

Description

An intelligent combination of fiber optic (100Base-FX) and twisted pair (10/100Base-TX) is obtained with the Fast Ethernet Micro Switch. The device offers to the user also the standard RJ-45 ports for the connection of the end equipment to a fiber optic network. The compact 45x45 switches are designed for the direct installation into cable trunks and sub-floor boxes.

The 6 port version has on its rear side an additional RJ-45 downlink 10/100Base-TX that is covered after the installation. This additional connection enables cascading other Micro Switches offering thus additional connection capacities. The Fast Ethernet Micro Switch has an integrated 230 VAC power unit. The device can be optionally manageable (article number with „M“ extension). The manageable version offers VLAN operation according to IEEE 802.1Q and further security features such as IEEE 802.1X, accounting, etc.

Properties

- Cost efficient copper/fiber integration
- Vertical/horizontal version
- Fast, tool-free mounting by snap-in installation
- Optional integrated management with several configuration and monitoring features
- Optional version with an additional 10/100Base-TX downlink port
- Integrated power supply with 100 – 240 V AC input

Dimensions

Order Information

Description	Article Number
6 Port Installation Switch, horizontal mounting, 1x 100Base-FX, Multimode 1310 nm ST, SNMP/Web/CLI Management, VLAN, QoS	MS450330M
	MS450331M
	MS450332M
6 Port Installation Switch, horizontal mounting 1x 100Base-FX, Single mode 1310 nm SC, SNMP/Web/CLI Management, VLAN, QoS	MS450333M
6 Port Installation Switch, vertikal mounting 1x 100Base-FX, Multimode 1310 nm ST, SNMP/Web/CLI Management, VLAN, QoS	MS450340M
6 Port Installations-Switch, vertikal mounting 1x 100Base-FX, Multimode 1310 nm SC, SNMP/Web/CLI Management, VLAN, QoS	MS450341M
6 Port Installations-Switch, vertikal mounting 1x 100Base-FX, Single mode 1310 nm ST, SNMP/Web/CLI Management, VLAN, QoS	MS450342M
6 Port Installations-Switch, vertikal mounting 1x 100Base-FX, Single mode 1310 nm SC, SNMP/Web/CLI Management, VLAN, QoS	MS450343M

"This document in whole or in part may not be duplicated, reproduced, stored or retransmitted without prior written permission of MICROSENS GmbH & Co. KG. All information in this document is provided 'as is' and subject to change without notice. MICROSENS GmbH & Co. KG disclaims any liability for the correctness, completeness or quality of the information provided, fitness for a particular purpose or consecutive damage. MICROSENS is a trademark of MICROSENS GmbH & Co. KG. Any product names mentioned herein may be trademarks and/or registered trademarks of their respective companies. (v04_hb)"