




MIGNON PLUS 3P

WORKING CONDITIONS

Max working pressure _____ 8 bar (116 psi)
 Max working temperature _____ 45°C (113°F)
 Min working temperature _____ 4°C (39,2°F)

SPECIFICATIONS

Non-toxic materials, suitable for drinking water.
 Head and ring nut: reinforced polypropylene.
 Bowl AS: SAN.
 Bowl AB: reinforced polypropylene.
 O-ring: EPDM.
 Breather-valve (only Duplex): body polypropylene, o-ring EPDM.
 IN/OUT brass threads: CW 614 N brass.



2 PORTS HEADS

MIGNON PLUS 3P clear housings

HOUSINGS WITH BRASS BSP THREADS


CODE	MODEL	SUITABLE CARTRIDGE	IN/OUT	THREADS	DIMENSIONS mm		
					A	B	C
RA101P111	MIGNON PLUS L3P MFO AS	5" M	1/2"	BRASS-BSP	176	94	89
RA101P411	MIGNON PLUS L3P AFO AS	5" M	3/4"	BRASS-BSP	178	94	89
RA103P111	MIGNON PLUS S3P MFO AS	5" M	1/2"	BRASS-BSP	177	90	89



MIGNON PLUS 3P blue housings

HOUSINGS WITH BRASS BSP THREADS

CODE	MODEL	SUITABLE CARTRIDGE	IN/OUT	THREADS	DIMENSIONS mm		
					A	B	C
RA101P112	MIGNON PLUS L3P MFO AB	5" M	1/2"	BRASS-BSP	176	94	89
RA101P412	MIGNON PLUS L3P AFO AB	5" M	3/4"	BRASS-BSP	178	94	89
RA103P112	MIGNON PLUS S3P MFO AB	5" M	1/2"	BRASS-BSP	177	90	89

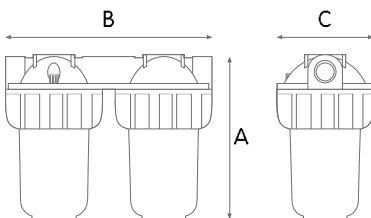

MIGNON DUPLEX PLUS 3P

MIGNON DUPLEX PLUS 3P clear housings

HOUSINGS WITH BRASS BSP THREADS

CODE	MODEL	SUITABLE CARTRIDGE	IN/OUT	THREADS	DIMENSIONS mm		
					A	B	C
RA102P111	MIGNON DUPLEX PLUS L3P MFO AS	5" M	1/2"	BRASS-BSP	176	194	89



MIGNON DUPLEX PLUS 3P blue housings

HOUSINGS WITH BRASS BSP THREADS

CODE	MODEL	SUITABLE CARTRIDGE	IN/OUT	THREADS	DIMENSIONS mm		
					A	B	C
RA102P112	MIGNON DUPLEX PLUS L3P MFO AB	5" M	1/2"	BRASS-BSP	176	194	89

