

Oil-Rite Corporation

4325 Clipper Drive, P.O. Box 1207

Manitowoc, WI. 54221-1207

Phone: (920) 682-6173 • Fax: (920) 682-7699

Email: sales@oilrite.com • Web Address: www.oilrite.com**Item # B1559-22CL-M12X1.75, Standard Steel Liquid Level Gage, 22" Centerline, Front Mount M12 X 1.75**

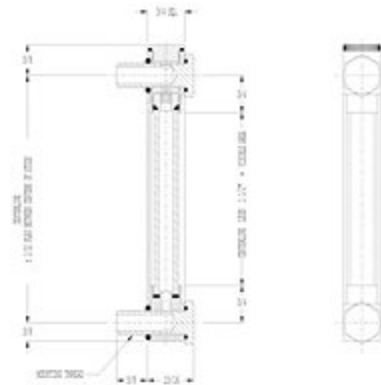
Standard Steel Liquid Level Gages can be used to view liquid levels in hydraulic reservoirs, tanks, large steel mill pumps, gearboxes, bearing housings, crankcases, transformers and machinery oil reservoirs. Their use can be extended to any industrial liquid level viewing application.

This sturdy gage is made of plated steel. The glass sight is protected by steel on three sides. A red line on a white background enhances liquid level visibility. Leak-proof construction is achieved with Buna-N seals. The unit tolerates up to 125 PSI and 225° F.

Fluid enters through the cross hole in the hollow lower bolt. The gage is vented into the tank through the cross hole in the top bolt. The length between the center of the two bolts is referred to as the center line. The distance between the center of the tank holes must be within 1/32" of the center line measurement. This gage is mounted from the front of the tank with (2) M12 X 1.75 plated steel bolts. The bolts should be torqued to 90 in-lbs.

For fractional inch centerline distances, level markings or other seal options, please consult factory.

Pictured With
12" Centerline

**Specifications**

Centerline	22"
Mounting	M12 X 1.75
Feature	Standard
Max Pressure	125 PSI
Max Temperature	225° F
Seals	Buna-N
Body Material	Plated Steel