



**Produktions- und Vertriebs GmbH
für Stromversorgungsanlagen**

Description DC-DC Converter
Type P550
Variant No 308B
Date 23.08.2019
Page 1
Pages total 4

Hans-Sachs-Str.2
63755 Alzenau
Telefon 06023/9798-0
Telefax 06023/9798-18
Email info@quel.de
Homepage www.quel.de

Input

Input voltage	DC 115V +15%-10%
Inrush current	< 30Apk limited with NTC
Nominal Input Power	680VA max
Hold up time	>20ms at full load and nominal Input voltage
RFI line conducted	Curve A Filter in accordance with EN 55011 u. EN55082
Isolation	8mm Input – Output / 3mm Input – case / 2mm Output – case
Efficiency	typ. 80%
High voltage test	EN 60950 without Y-Caps
Safety	EN 60950,
ESD	EN 61000 -4 - 2 :8kV
Burst	EN 61000 -4 - 4 :4kV

Output

Output ripple rms/pp	0,2% rms	1%pp Bandwith 30Mhz
Dynamic voltage regulation	±2%	load changed ±10% (50% load)
Line regulation	0,02%	
Output voltage	24.0V	
Output current	15A	
Output voltage adjustment range	24-28V	
Temperature coefficient	0,02%/K	

Safety Functions and Control signals

Power limitation	550W ±5%
DC good relay	30V/1A (gold coated) contact closed: <21V/ contact open:>23V
Current limitation	constant current >110%
Overvoltage protection	120-130% Reset :line disconnection

Ambient

Temperature range	0-60°C without derating
Storage temperature range	-25°C to + 85°C
Rel Humidity	0-90% not condensed

Mechanic

Dimensions	see drawing
Input Terminal	screw terminals max 4.0mm ² (X1/3 way)
Output Terminal	screw terminals max 4.0mm ² (X1/8 way)
Fitting screws	4 fixing screws M3 must not penetrate by more than 5mm



Änderung vorbehalten/ subject to change without notice

Pfad/Path E:\Dokumentation\P350-550\V308-408-Sie\Beschreibung\DS_P550-V308B.doc

Description DC-DC Converter
Type P550
Variant No 308B
Date 23.08.2019
Page 2
Pages total 4

Hans-Sachs-Str.2
 63755 Alzenau
 Telefon 06023/9798-0
 Telefax 06023/9798-18
 Email info@quel.de
 Homepage www.quel.de

Mechanics

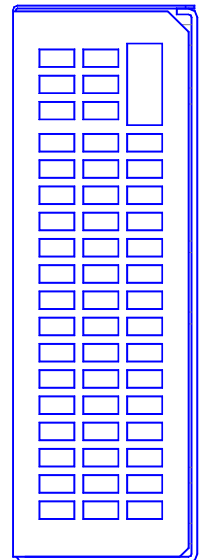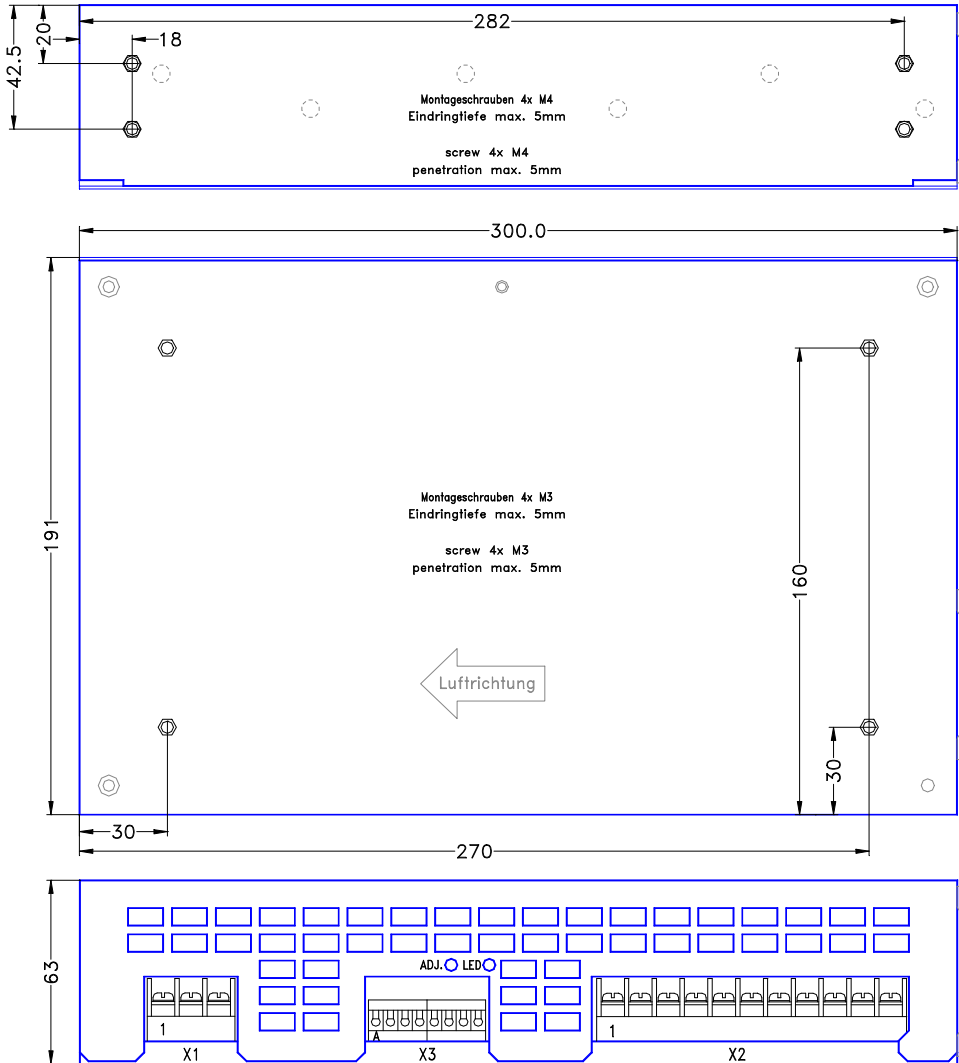

M-P55-B



Produktions und Vertriebs GmbH für Stromversorgungen

Description	DC-DC Converter
Type	P550
Variant No	308C
Date	26.08.2005
Page	3
Pages total	4

Hans-Sachs-Str.2
63755 Alzenau
Telefon 06023/9798-0
Telefax 06023/9798-18
Email info@quel.de
Homepage www.Quel.de

Input

The line is protected by fuse F1 and is taken to connector X1 of converter P550 via screw terminals. The high switch-on currents of the input capacitors are reduced via the NTC R1.R1 is bypassed by relay K1 when output voltage rise DC-supply filtering is ensured by components , L1, L2 together with capacitors C1, C3 between the plus and minus lines. Primary Y capacitors C4, 5 ,C62,C63 and secondary capacitor C6 also serve for suppressing unbalanced spurious components with reference to the protective-earthing potential. The DC Supply is protected against reverse voltages with a Diode fuse combination . For the symmetric filtering between the plus and minus and the Hold up time of the unit are placed reservoirs tank capacitors C8, 9,58,59.

Input terminals

X1/1 + Input Voltage (115Vdc)
X1/2 - Input Voltage
X1/3 PE

Output

The pulsing rectangular AC voltage is rectified by power diodes V13, 14 and integrated via choke L6. The LC modules after the choke are for filtering the DC voltage (C23,24,25,26).The output voltage is decoupled with Diode V41. The power supply is able to work in parallel standby with a 24V-Battery. When the output voltage drops in front of diode V41 under 21Vdc, relay K2 is closed. The relay contact is opened if the voltage is greater then 23Vdc

Output terminals

X3/A Relay common contact
X3/B Relay normally closed contact
X2/2-4 V1=27.6V/15A (default setting)
X2/5-7 0V

Voltage regulation

For voltage regulation, a voltage is tapped off the output +27.6V and routed to SMD

subassembly A2 for the comparison of nominal/actual values. Voltage deviations are converted into a mark-to-space variation via the error amplifier and the following stages; this variation acts on the bases of primary switching transistors V5, 6 via driver transformer T3. Load resistors R23 ensure unimpaired open-circuit characteristics.

Primary Switching Circuit

The halved DC voltage is applied to switching transistors V5 and V6 via splitting capacitors C10, 11, current, driver and main transformers (T4, 3, 5). The switching transistors operate in push-pull half-wave circuit at a switch-mode frequency of approx. 42 kHz. The components fitted in the base circuit of the switching transistors ensure the generation of optimum base current and their protection. When the transistors V5, 6 are conducting, energy is transferred from T5 to the secondary through the primary windings.

Current Regulation

The primary current is monitored via current transformer T4. R31 is the load of the secondary winding for the current signal. The current signal is connected to SMD subassembly A2 the same as for the voltage regulation and compared with the nominal value. In the current-limiting mode, the mark-to-space ratio is reduced by the control circuit depending on the current signal and routed to the driver circuit. The current-limiting circuit has a constant current characteristic.

Overvoltage, Overtemperature

Overvoltage inside and outside the unit or overtemperature causes the converter to be set to the low-power mode. The overvoltage is detected via a second voltage path on the SMD subassembly A2; a small-signal thyristor inhibits the output stage. After eliminating the overvoltage or overtemperature, the power supply has to be reset by switching off the DC supply.

Description DC-DC Converter
Type P550
Variant No 308C
Date 26.08.2005
Page 4
Pages total 4

Hans-Sachs-Str.2
 63755 Alzenau
 Telefon 06023/9798-0
 Telefax 06023/9798-18
 Email info@quel.de
 Homepage www.Quel.de

Block diagram

