




<b>Tipo :</b> <b>Type :</b>	<b>G10</b>		<b>do:</b> 10    mm
<b>Omologazione</b> <b>Homologation</b>	<b>PN</b>	<b>Coefficiente efflusso ridotto</b> <b>Low flow coefficient</b>	<b>Campo di taratura</b> <b>Setting range</b>
E.D. 97/23/EC IV^ Cat.(PED)	40	0,85	0,3 - 30,0 bar
GOST-R	40	0,85	0,3 - 30,0 bar
ATEX Ex II 2 G c	40	0,85	0,3 - 30,0 bar
ATEX Ex II 2 D c (1)	40	0,85	0,3 - 30,0 bar
ASME VIII Div.1	40	0,629	1,0 - 40,0 bar
Canadian Reg. CRN	40	0,629	1,0 - 40,0 bar
<b>CONFIGURAZIONE - CONFIGURATION</b>			
<b>Materiale</b> <b>Material</b>	<b>Ottone</b> <b>Brass</b>	<b>Mista Ottone-Acciaio inox</b> <b>Mixed Brass-Stainless steel</b>	<b>Acciaio inox</b> <b>Stainless steel</b>
<b>Modelli</b> <b>Model</b>	Con ghiera <i>With ring nut</i>	Con ghiera <i>With ring nut</i>	Con ghiera <i>With ring nut</i>
	Senza Ghiera <i>Without ring nut</i>	Senza Ghiera <i>Without ring nut</i>	Senza Ghiera <i>Without ring nut</i>
	Con leva <i>With lever</i>	Con leva <i>With lever</i>	Con leva <i>With lever</i>
	/	/	Con apertura pneumatica <i>With pneumatic opening</i>
	/	/	Pneumatica con sensore <i>Pneumatic with sensor</i>
<b>Sedi di Tenuta</b> <b>Seal System</b>	N.B.R. (Std) -10 / + 100 °C E.P.D.M. -50 / + 150 °C VITON -20 / +200 °C SILICONE -60 / +200 °C TEFLON -196 / +250 °C KALREZ -20 / +250 °C /	N.B.R. (Std) -10 / + 100 °C E.P.D.M. -50 / + 150 °C VITON -20 / +200 °C SILICONE -60 / +200 °C TEFLON -196 / +250 °C KALREZ -20 / +250 °C Metal -196 / +250 °C	N.B.R. (Std) -10 / + 100 °C E.P.D.M. -50 / + 150 °C VITON -20 / +200 °C SILICONE -60 / +200 °C TEFLON -196 / +250 °C KALREZ -20 / +275 °C Metal -196 / +450 °C
<b>Connessione Entrata</b> <b>Inlet Connection</b>	G.3/8"-1/2"-3/4"-1"ISO228 R3/8"-1/2"-3/4"-1"EN10226 3/8" - 1/2" - 3/4" - 1" NPT DN15-20-25 PN16-40 1/2" - 3/4" - 1" 150-300 lb / /	G.3/8"-1/2"-3/4"-1"ISO228 R3/8"-1/2"-3/4"-1"EN10226 3/8" - 1/2" - 3/4" - 1" NPT 1" - 1"1/2 Tri Clamp DN25 DIN405-11851 DN15-20-25 PN16-40 1/2" - 3/4" - 1" 150-300 lb	G.3/8"-1/2"-3/4"-1"ISO228 R3/8"-1/2"-3/4"-1"EN10226 3/8" - 1/2" - 3/4" - 1" NPT 1" - 1"1/2 Tri Clamp DN25 DIN405-11851 DN15-20-25 PN16-40 1/2" - 3/4" - 1" 150-300 lb
<b>Connessione Uscita</b> <b>Outlet Connection</b>	G.1" ISO228 DN25 PN16-40 1" 150-300 lb / / / /	G.1" ISO228 1" - 1"1/2 Tri Clamp DN25 DIN405-11851 DN25 PN16-40 1" 150-300 lb / /	G.1" ISO228 1" - 1"1/2 Tri Clamp DN25 DIN405-11851 DN25 PN16-40 1" 150-300 lb / /
A richiesta possono essere eseguiti collaudi dai più prestigiosi enti quali: INAIL (area ISPESL), TÜV, RINA, Bureau Veritas, ABS e Lloyd Register. On request tests can be made by the most prestigious societies, such as: INAIL (area ISPESL), TÜV, RINA, Bureau Veritas, ABS and Lloyd Register.			
<b>Note: (1) No Modello Con leva / No Model With lever</b>			

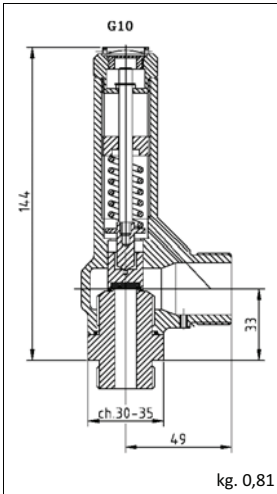


kg. 0,81

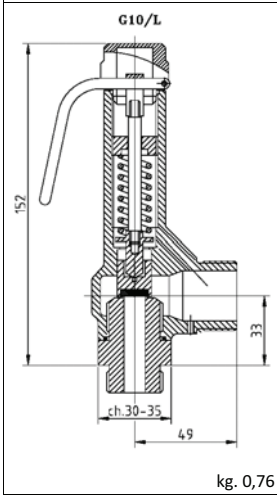

kg. 0,76

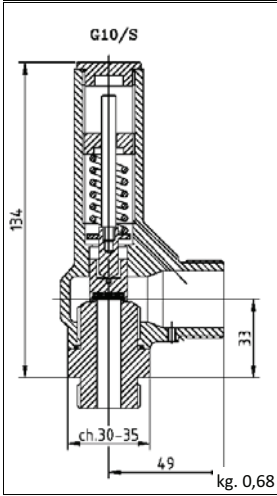

kg. 0,68

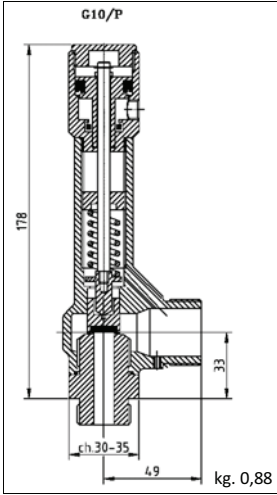

kg. 0,88